



DOUBLE NANO TAP

Quarter-turn ball taps with two independent outlets for outdoor or indoor plumbing installations such as gardens, terraces, yards...

- A single water inlet and two independent outlets.
- VITAQ system, more life, less lime at higher temperatures.
- Without reducing flow, it prolongs comfort at service points.
- European Brass, DW (4MS) quality for use in drinking water installations.
- 100% valves are tested for inner leakage.
- Strong one-piece body construction for secure installations.
- Double o-ring, ensures external tightness.



TECHNICAL SHEET DOUBLE NANO TAP

PRODUCT DESCRIPTION

DOUBLE NANO tap are two quarter-turn ball taps in a single body with manual operation for plumbing installations, where the connection is made by a threaded ends.

This valve allows the water supply to be cut off independently to the equipment connected at each of its two outlets, providing the following advantages:

- Avoid unnecessary works when there is only one water point and two service are required.
- Reduction in the number of threaded fittings.
- Compact, less space for installation.
- Increase reliability and safety of the installations by reducing the number of connections.

VITAQ system increase the valve life span and flow comfort in hard water areas.

PRODUCT SCOPE

Specially designed for outdoor plumbing installations such as gardens, terraces, yards.. or in indoor installations where a tap with two individual services connected to each outlet is required.

Hose connection nozzle is included.


GENERAL DIMENSIONS, PRESSURE AND TEMPERATURE

Code	Size	A (mm)	B (mm)	C (mm)	D (mm)	PN (bar)	Temp. (°C)*
00472	1/2M X 3/4M X 3/4M 15	110	38	61	32	16	0 to 90
0047201	1/2M X 3/4M X 3/4M 15	110	38	61	32	16	0 to 90
00474 **	1/2M X 3/4M X 3/4M 15	110	38	61	32	16	0 to 90

Threading according to ISO228

* Freezing is excluded.

** Polypropylene nozzle.

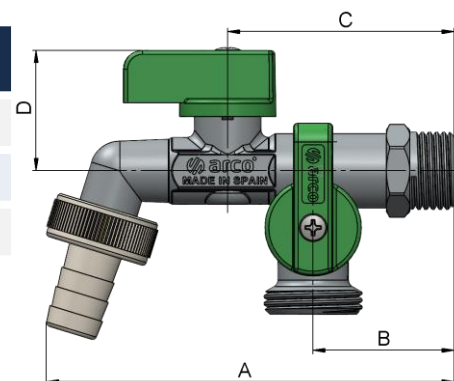




MATERIALS

Item	Component	Material	Finishing
1	O-rings	EPDM	-
2	Stem-ball	Anti-lime polymer	VITAQ
3	Screw	Stainless steel	Stainless steel
4	Handle	PA	Green
5	Supporting clip	POM	-
6	Supporting clip	POM	-
7	Body	Brass CW617N	Chrome plated
8	Seat	NBR	-
9	Nozzle	Brass *	Nickel plated*
10	O-ring	NBR	-
11	Tap nut	Brass CW617N	Chrome plated
12	Aerator	PTFE	-


* Model 00474 nozzle made of Polypropylene.

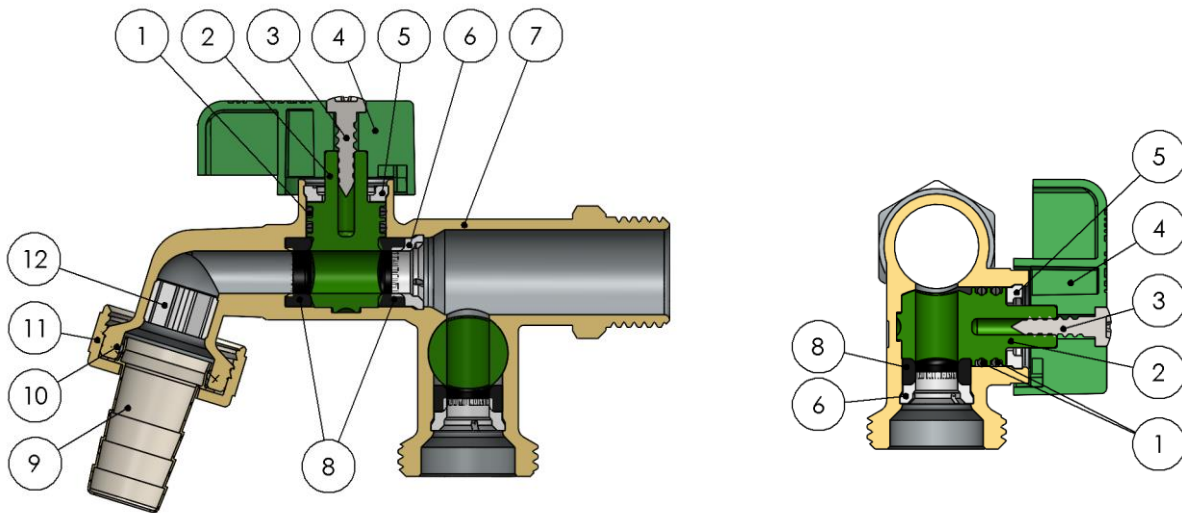



TECHNICAL DATA

Pressure vs. temperature

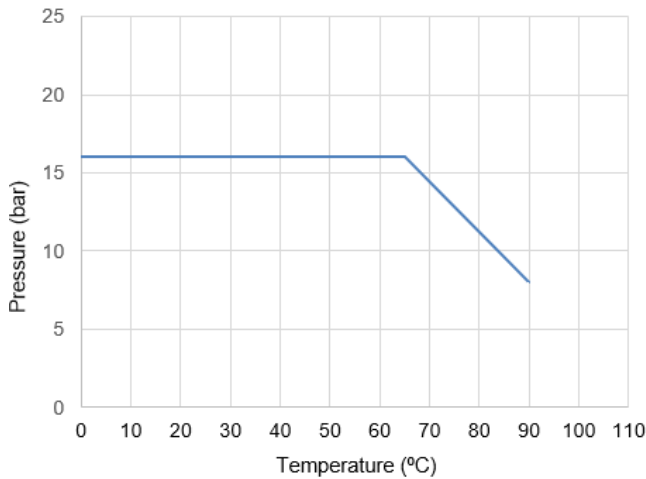


Temperature range excludes freezing.

Compatibility with fluids

Fluid	Compatibility
Drinking water and domestic hot water	Excellent

For any other fluid, please contact Arco technical service.

Hydraulic features.
Flow vs. loss of pressure.

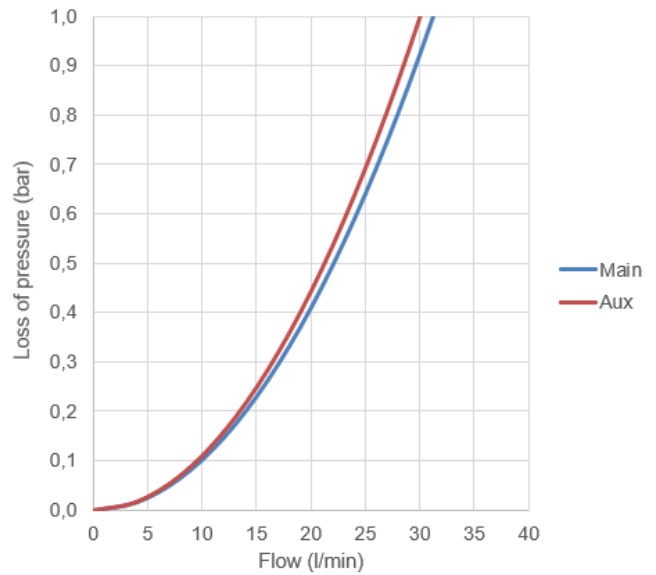

Size	Main Outlet (Main)	Auxiliary Outlet (Aux)
Kv	1,9	1,8

Kv (m³/h), cubic meters per hour that flow through the valve generating a loss of 1 bar pressure.

INSTALLATION AND OPERATION INSTRUCTIONS

Before performing any action, the water supply to the installation should be shut off. Make sure there is no dirt or foreign objects in the connection to the network. Apply the appropriate sealing material to the inlet thread of the valve. The valve should be installed with a suitable tool, preferably with a wrench to hold the body. The tool should act on the flat surfaces of the valve body to avoid deforming this area due to excessive pressure from the tool.

Do not alter the assembly of the tap components; replacement or disassembly of them may cause external leaks or vary their operation, except for the connection nozzle.



All products have an environmental impact during its life cycle, even once retired. All the components of this product can be recycled. Once the use is over, leave the valve in any recycling green point. Válvulas Arco reserves the right to change the product or any of its technical specifications without prior notice.

FT04020ING – Edition 2024-12